

# Theory of Root-Raised Cosine Filter

Michael Joost

Krefeld, DE\*

(Dated: December 2010)

**Abstract** The raised cosine filter is used in wireless transmission (e.g. 3GPP) to pulse-shape the chip stream output before it is modulated to the RF. The spectrum is bandwidth limited in order to avoid interferences with neighbour symbols.

Keywords: digital filter;raised-cosine;root-raised;3GPP;UMTS

## I. INTRODUCTION

The amplitude steps in a digital chip stream are the cause for high-frequency spectral components. Since the signal is transmitted on a bandwidth-limited channel, smearing of adjacent symbols may happen, known as inter symbol interference (ISI). In order to avoid such interference, the signal is low-pass filtered.

The raised-cosine filter satisfies the Nyquist criterion of suppressing the spectral distortion at integral multiples of the sampling rate. To improve noise cancellation, the filter is usually split into two parts, the root-raised-cosine filter, one at the sender side and the other at the receiver side.

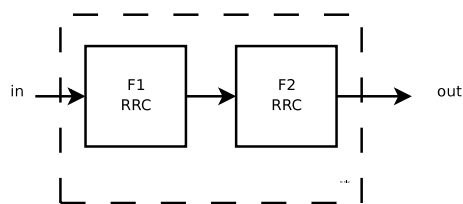


FIG. 1: Split Filter

The transfer function of each of the two filter parts is the root-raised cosine (RRC) function, which is the square root of the raised cosine filter function. The combination of the two root-raised cosine filters yields the raised cosine transfer function.

### A. Raised Cosine Filter

The transfer function of the raised cosine filter is (acc. [1]):

$$H_{RC}(\omega) = \begin{cases} A & \text{for } |\omega| \leq \omega_1 \\ \frac{A}{2} \left(1 + \cos\left(\pi \frac{|\omega| - \omega_1}{r\omega_c}\right)\right) & \text{for } \omega_1 \leq |\omega| \leq \omega_2 \\ 0 & \text{for } |\omega| > \omega_2 \end{cases}$$

$$\text{with } \omega_1 = \frac{1-r}{2}\omega_c, \quad \omega_2 = \frac{1+r}{2}\omega_c \quad (1)$$

$$\text{and } A = \frac{2\pi}{\omega_c} = T_c$$

In this notation the total energy is (see Appendix 1):

$$\|H_{RC}\|^2 = \int_{-\infty}^{\infty} |H_{RC}(\omega)|^2 d\omega = \frac{\pi^2}{\omega_c} (4-r) \quad (2)$$

### B. Root-Raised Cosine Filter

The transfer function of the root-raised cosine filter is:

$$H_{RRC}(\omega) = \begin{cases} B & \text{for } |\omega| \leq \omega_1 \\ \frac{B}{\sqrt{2}} \sqrt{1 + \cos\left(\pi \frac{|\omega| - \omega_1}{r\omega_c}\right)} & \text{for } \omega_1 \leq |\omega| \leq \omega_2 \\ 0 & \text{for } |\omega| > \omega_2 \end{cases}$$

with  $B = \sqrt{A} = \sqrt{\frac{2\pi}{\omega_c}} = \sqrt{T_c} \quad (3)$

In this notation the total energy is (see Appendix 2):

$$\|H_{RRC}\|^2 = \int_{-\infty}^{\infty} |H_{RRC}(\omega)|^2 d\omega = 2\pi \quad (4)$$

The (normalized) spectrum of the RC and RRC filter is shown in Fig 2.

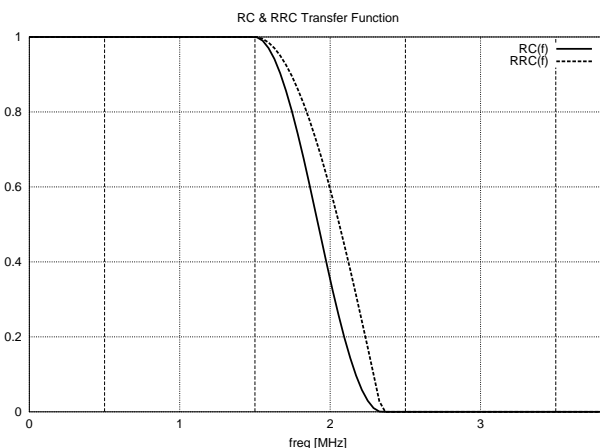


FIG. 2: RC & RRC Transfer Function

\*<http://www.michael-joost.de>;

Copyright © 2010 Michael Joost. All rights reserved.

To obtain the impulse response  $f_{RRC}(t)$  from the transfer function it is assumed that the impulse response is a real, even function, hence,  $f_{RRC}(t) = f_{RRC}(-t)$ .

Then,  $f_{RRC}(t)$  can be calculated from the Fourier integral:

$$\begin{aligned}
f_{RRC}(t) &= \frac{1}{2\pi} \int_{-\infty}^{\infty} H_{RRC}(\omega) e^{i\omega t} d\omega \\
&= \frac{1}{\pi} \int_0^{\infty} H_{RRC}(\omega) \cos(\omega t) d\omega \\
&= \frac{B}{\pi} \int_0^{\omega_1} \cos(\omega t) d\omega \\
&+ \frac{1}{\pi} \int_{\omega_1}^{\omega_2} H_{RRC}(\omega) \cos(\omega t) d\omega \quad (5) \\
&+ \frac{1}{\pi} \int_{\omega_2}^{\infty} 0 \cos(\omega t) d\omega \\
&= \frac{B}{t\pi} \sin(\omega t) \Big|_0^{\omega_1} \\
&+ \frac{1}{\pi} \int_{\omega_1}^{\omega_2} H_{RRC}(\omega) \cos(\omega t) d\omega
\end{aligned}$$

The signal is a superposition of three spectral components. The first component is a constant spectrum, resulting in a sinc component in the time domain. The second spectral component results from the root-raised cosine function, and the third component (at higher frequencies) is zero.

Thus, the impulse response function is

$$\begin{aligned}
\Rightarrow & \boxed{f(t) = \frac{B}{\pi} \left( \frac{1}{t} \sin(\omega_1 t) \right.} \\
& \left. + \frac{1}{\sqrt{2}} \int_{\omega_1}^{\omega_2} \sqrt{1 + \cos(a|\omega| - b)} \cos(\omega t) d\omega \right) } \\
& \text{with } a = \frac{\pi}{r\omega_c} = \frac{T_c}{2r} \\
& \text{and } b = \frac{\pi\omega_1}{r\omega_c} = \frac{1-r}{2} \frac{\pi\omega_c}{r\omega_c} = \pi \frac{1-r}{2r} \quad (6)
\end{aligned}$$

To calculate the integral in (6) we consider that

$$\begin{aligned}
\cos(x) &= \cos\left(\frac{x}{2} + \frac{x}{2}\right) = \cos^2\left(\frac{x}{2}\right) - \sin^2\left(\frac{x}{2}\right) \\
&= 1 - \sin^2\left(\frac{x}{2}\right) - \sin^2\left(\frac{x}{2}\right) = 1 - 2\sin^2\left(\frac{x}{2}\right) \quad (7)
\end{aligned}$$

and therefore

$$\begin{aligned}
1 + \cos(x) &= 1 + 1 - 2\sin^2\left(\frac{x}{2}\right) = 2\left(1 - \sin^2\left(\frac{x}{2}\right)\right) \\
&= 2\cos^2\left(\frac{x}{2}\right) \quad (8) \\
\Rightarrow & \boxed{\sqrt{1 + \cos(x)} = \sqrt{2} \left| \cos\left(\frac{x}{2}\right) \right|}
\end{aligned}$$

The primitive of the integral from (6) can therefore be evaluated as

$$\begin{aligned}
& \int \sqrt{1 + \cos(a|\omega| - b)} \cos(\omega t) d\omega \\
&= \sqrt{2} \int \underbrace{\cos\left(\frac{1}{2}(a|\omega| - b)\right)}_{f(\omega)} \underbrace{\cos(\omega t)}_{g'(\omega)} d\omega \quad (9)
\end{aligned}$$

With the partial integration rule

$$\int f(x)g'(x) dx = f(x)g(x) - \int f'(x)g(x) dx \quad (10)$$

and

$$f(\omega) = \cos\left(\frac{1}{2}(a|\omega| - b)\right) \quad g(\omega) = \frac{1}{t} \sin(\omega t) \quad (11)$$

$$f'(\omega) = -\frac{a}{2} \sin\left(\frac{1}{2}(a|\omega| - b)\right) \quad g'(\omega) = \cos(\omega t) \quad (12)$$

we get from (9)

$$\begin{aligned}
& \int \underbrace{\cos\left(\frac{1}{2}(a|\omega| - b)\right)}_{f(\omega)} \underbrace{\cos(\omega t)}_{g'(\omega)} d\omega = \\
& \underbrace{\cos\left(\frac{1}{2}(a|\omega| - b)\right)}_{f(\omega)} \underbrace{\frac{1}{t} \sin(\omega t)}_{g(\omega)} \\
& - \int \underbrace{-\frac{a}{2} \sin\left(\frac{1}{2}(a|\omega| - b)\right)}_{f'(\omega)} \underbrace{\frac{1}{t} \sin(\omega t)}_{g(\omega)} d\omega = \\
& \frac{1}{t} \left( \cos\left(\frac{1}{2}(a|\omega| - b)\right) \sin(\omega t) \right. \\
& \left. + \frac{a}{2} \int \underbrace{\sin\left(\frac{1}{2}(a|\omega| - b)\right)}_{f_2(\omega)} \underbrace{\sin(\omega t)}_{g_2'(\omega)} d\omega \right) \quad (13)
\end{aligned}$$

Applying the partial integration rule again with

$$f_2(\omega) = \sin\left(\frac{1}{2}(a|\omega| - b)\right) \quad g_2(\omega) = -\frac{1}{t} \cos(\omega t) \quad (14)$$

$$f_2'(\omega) = \frac{a}{2} \cos\left(\frac{1}{2}(a|\omega| - b)\right) \quad g_2'(\omega) = \sin(\omega t) \quad (15)$$

we get

$$\begin{aligned}
& \int \cos\left(\frac{1}{2}(a|\omega| - b)\right) \cos(\omega t) \, d\omega \\
&= \frac{1}{t} \left( \cos\left(\frac{1}{2}(a|\omega| - b)\right) \sin(\omega t) \right. \\
&\quad \left. + \frac{a}{2} \left(-\sin\left(\frac{1}{2}(a|\omega| - b)\right)\right) \frac{1}{t} \cos(\omega t) \right. \\
&\quad \left. - \int \frac{a}{2} \cos\left(\frac{1}{2}(a|\omega| - b)\right) \left(-\frac{1}{t} \cos(\omega t)\right) \, d\omega \right) \\
&= \frac{1}{t} \left( \cos\left(\frac{1}{2}(a|\omega| - b)\right) \sin(\omega t) \right. \\
&\quad \left. - \frac{a}{2t} \sin\left(\frac{1}{2}(a|\omega| - b)\right) \cos(\omega t) \right) \\
&\quad + \frac{a^2}{4t^2} \int \cos\left(\frac{1}{2}(a|\omega| - b)\right) \cos(\omega t) \, d\omega
\end{aligned} \tag{16}$$

Resolving for  $\int \cos\left(\frac{1}{2}(a|\omega| - b)\right) \cos(\omega t) \, d\omega$  yields

$$\begin{aligned}
& \left(1 - \frac{a^2}{4t^2}\right) \int \cos\left(\frac{1}{2}(a|\omega| - b)\right) \cos(\omega t) \, d\omega \\
&= \frac{1}{t} \left( \cos\left(\frac{1}{2}(a|\omega| - b)\right) \sin(\omega t) \right. \\
&\quad \left. - \frac{a}{2t} \sin\left(\frac{1}{2}(a|\omega| - b)\right) \cos(\omega t) \right)
\end{aligned} \tag{17}$$

$$\Rightarrow \boxed{
\begin{aligned}
& \int \cos\left(\frac{1}{2}(a|\omega| - b)\right) \cos(\omega t) \, d\omega \\
&= \frac{1}{t\left(1 - \frac{a^2}{4t^2}\right)} \left( \cos\left(\frac{1}{2}(a|\omega| - b)\right) \sin(\omega t) \right. \\
&\quad \left. - \frac{a}{2t} \sin\left(\frac{1}{2}(a|\omega| - b)\right) \cos(\omega t) \right)
\end{aligned}
} \tag{18}$$

From (9) we get

$$\begin{aligned}
& \int \sqrt{1 + \cos(a|\omega| - b)} \cos(\omega t) \, d\omega \\
&= \frac{\sqrt{2}}{t\left(1 - \frac{a^2}{4t^2}\right)} \left( \cos\left(\frac{1}{2}(a|\omega| - b)\right) \sin(\omega t) \right. \\
&\quad \left. - \frac{a}{2t} \sin\left(\frac{1}{2}(a|\omega| - b)\right) \cos(\omega t) \right)
\end{aligned} \tag{19}$$

and the integral value

$$\begin{aligned}
& \int_{\omega_1}^{\omega_2} \sqrt{1 + \cos(a\omega - b)} \cos(\omega t) \, d\omega \\
&= \frac{\sqrt{2}}{t\left(1 - \frac{a^2}{4t^2}\right)} \left( \left( \cos\left(\frac{1}{2}(a\omega_2 - b)\right) \sin(\omega_2 t) \right. \right. \\
&\quad \left. \left. - \frac{a}{2t} \sin\left(\frac{1}{2}(a\omega_2 - b)\right) \cos(\omega_2 t) \right) \right. \\
&\quad \left. - \left( \cos\left(\frac{1}{2}(a\omega_1 - b)\right) \sin(\omega_1 t) \right. \right. \\
&\quad \left. \left. - \frac{a}{2t} \sin\left(\frac{1}{2}(a\omega_1 - b)\right) \cos(\omega_1 t) \right) \right) \\
&= \frac{\sqrt{2}}{t\left(1 - \frac{a^2}{4t^2}\right)} \left( \cos\left(\frac{1}{2}(a\omega_2 - b)\right) \sin(\omega_2 t) \right. \\
&\quad \left. - \frac{a}{2t} \sin\left(\frac{1}{2}(a\omega_2 - b)\right) \cos(\omega_2 t) \right. \\
&\quad \left. - \cos\left(\frac{1}{2}(a\omega_1 - b)\right) \sin(\omega_1 t) \right. \\
&\quad \left. + \frac{a}{2t} \sin\left(\frac{1}{2}(a\omega_1 - b)\right) \cos(\omega_1 t) \right)
\end{aligned} \tag{20}$$

With  $a = \frac{\pi}{r\omega_c}$  and  $b = \frac{\pi(1-r)}{2r}$  we can make these substitutions

$$\begin{aligned}
\frac{1}{2}(a\omega_1 - b) &= \frac{1}{2} \left( \frac{\pi}{r\omega_c} \frac{1-r}{2} \omega_c - \pi \frac{1-r}{2r} \right) \\
&= \frac{\pi}{2} \left( \frac{(1-r)}{2r} - \frac{1-r}{2r} \right) \\
&= 0 \\
\Rightarrow \sin\left(\frac{1}{2}(a\omega_1 - b)\right) &= 0 \quad , \quad \cos\left(\frac{1}{2}(a\omega_1 - b)\right) = 1
\end{aligned} \tag{21}$$

and

$$\begin{aligned}
\frac{1}{2}(a\omega_2 - b) &= \frac{1}{2} \left( \frac{\pi}{r\omega_c} \frac{1+r}{2} \omega_c - \pi \frac{1-r}{2r} \right) \\
&= \frac{\pi}{2} \left( \frac{(1+r)}{2r} - \frac{1-r}{2r} \right) \\
&= \frac{\pi}{2} \\
\Rightarrow \sin\left(\frac{1}{2}(a\omega_2 - b)\right) &= 1 \quad , \quad \cos\left(\frac{1}{2}(a\omega_2 - b)\right) = 0
\end{aligned} \tag{22}$$

and get for the integral value

$$\begin{aligned}
& \int_{\omega_1}^{\omega_2} \sqrt{1 + \cos(a\omega - b)} \cos(\omega t) \, d\omega \\
&= \frac{4t\sqrt{2}}{4t^2 - \left(\frac{\pi}{r\omega_c}\right)^2} \left( \cos\left(\frac{\pi}{2}\right) \sin\left(\frac{1+r}{2}\omega_c t\right) \right)
\end{aligned}$$

$$\begin{aligned}
& -\frac{\pi}{2tr\omega_c} \sin\left(\frac{\pi}{2}\right) \cos\left(\frac{1+r}{2}\omega_c t\right) - \sin\left(\frac{1-r}{2}\omega_c t\right) \\
& = \frac{4t\sqrt{2}}{4t^2 - \left(\frac{\pi}{r\omega_c}\right)^2} \left( -\frac{\pi}{2tr\omega_c} \cos\left(\frac{1+r}{2}\omega_c t\right) - \sin\left(\frac{1-r}{2}\omega_c t\right) \right) \quad (23)
\end{aligned}$$

Now we have with (6)

$$\begin{aligned}
f(t) & = \frac{B}{\pi} \left( \frac{1}{t} \sin\left(\frac{1-r}{2}\omega_c t\right) + \frac{4t}{4t^2 - \left(\frac{\pi}{r\omega_c}\right)^2} \right. \\
& \quad \left. \left( -\frac{\pi}{2tr\omega_c} \cos\left(\frac{1+r}{2}\omega_c t\right) - \sin\left(\frac{1-r}{2}\omega_c t\right) \right) \right) \quad (24)
\end{aligned}$$

$$\begin{aligned}
f(t) & = \frac{B}{\pi} \left( \frac{1}{t} \sin\left((1-r)\pi\frac{t}{T_c}\right) + \frac{4t}{4t^2 - \left(\frac{T_c}{2r}\right)^2} \right. \\
& \quad \left. \left( -\frac{T_c}{4tr} \cos\left((1+r)\pi\frac{t}{T_c}\right) - \sin\left((1-r)\pi\frac{t}{T_c}\right) \right) \right) \quad (25)
\end{aligned}$$

$$\begin{aligned}
f(t) & = \frac{B}{\pi} \left( \frac{1}{t} \sin\left((1-r)\pi\frac{t}{T_c}\right) + \right. \\
& \quad \left( \frac{4t}{\left(\frac{T_c}{2r}\right)^2 - 4t^2} \frac{T_c}{4tr} \cos\left((1+r)\pi\frac{t}{T_c}\right) \right. \quad (26) \\
& \quad \left. \left. + \frac{4t}{\left(\frac{T_c}{2r}\right)^2 - 4t^2} \sin\left((1-r)\pi\frac{t}{T_c}\right) \right) \right)
\end{aligned}$$

$$\begin{aligned}
f(t) & = \frac{B}{\pi T_c} \left( \frac{T_c}{t} \sin\left((1-r)\pi\frac{t}{T_c}\right) \right. \\
& \quad + \frac{4tT_c}{\left(\frac{T_c}{2r}\right)^2 - 4t^2} \sin\left((1-r)\pi\frac{t}{T_c}\right) \quad (27) \\
& \quad \left. + \frac{4t}{\left(\frac{T_c}{2r}\right)^2 - 4t^2} \frac{T_c^2}{4tr} \cos\left((1+r)\pi\frac{t}{T_c}\right) \right)
\end{aligned}$$

$$\begin{aligned}
f(t) & = \frac{B}{\pi T_c} \left( \frac{1 - (4r\frac{t}{T_c})^2}{\frac{t}{T_c}(1 - (4r\frac{t}{T_c})^2)} \sin\left((1-r)\pi\frac{t}{T_c}\right) \right. \\
& \quad + \frac{4tT_c}{\left(\frac{T_c^2}{4r^2} - 4t^2\right)4\left(\frac{r}{T_c}\right)^2\frac{t}{T_c}} \sin\left((1-r)\pi\frac{t}{T_c}\right) \quad (28) \\
& \quad \left. + \frac{4tT_c^2}{4r^2 - 4t^2} \frac{\frac{r}{T_c^3}}{4tr\frac{r}{T_c^3}} \cos\left((1+r)\pi\frac{t}{T_c}\right) \right)
\end{aligned}$$

$$\begin{aligned}
f(t) & = \frac{B}{\pi T_c} \left( \frac{1 - (4r\frac{t}{T_c})^2}{\frac{t}{T_c}(1 - (4r\frac{t}{T_c})^2)} \sin\left((1-r)\pi\frac{t}{T_c}\right) \right. \\
& \quad + \frac{(4r\frac{t}{T_c})^2}{(1 - (4r\frac{t}{T_c})^2)\frac{t}{T_c}} \sin\left((1-r)\pi\frac{t}{T_c}\right) \quad (29) \\
& \quad \left. + \frac{4r\frac{t}{T_c}}{(1 - (4r\frac{t}{T_c})^2)\frac{t}{T_c}} \cos\left((1+r)\pi\frac{t}{T_c}\right) \right)
\end{aligned}$$

$$\begin{aligned}
f(t) & = \frac{B}{\pi T_c} \left( \frac{1 - (4r\frac{t}{T_c})^2 + (4r\frac{t}{T_c})^2}{\frac{t}{T_c}(1 - (4r\frac{t}{T_c})^2)} \sin\left((1-r)\pi\frac{t}{T_c}\right) \right. \\
& \quad \left. + \frac{4r\frac{t}{T_c}}{(1 - (4r\frac{t}{T_c})^2)\frac{t}{T_c}} \cos\left((1+r)\pi\frac{t}{T_c}\right) \right) \quad (30)
\end{aligned}$$

$$f(t) = C \frac{\sin\left((1-r)\pi\frac{t}{T_c}\right) + 4r\frac{t}{T_c} \cos\left((1+r)\pi\frac{t}{T_c}\right)}{\pi\frac{t}{T_c}(1 - (4r\frac{t}{T_c})^2)}$$

$$\text{with } C = \frac{B}{T_c} = \frac{1}{\sqrt{T_c}} \quad (31)$$

The total energy is (see Appendix 3):

$$\|f_{RRC}\|^2 = \int_{-\infty}^{\infty} |f_{RRC}(t)|^2 dt = 1 \quad (32)$$

According to Parseval's Theorem we find confirmed that  $\|H_{RRC}\|^2 = 2\pi \|f_{RRC}\|^2$

## II. IMPULSE RESPONSE FUNCTION

The impulse response of the root-raised cosine filter is according to (eq 31), and also as defined by the 3GPP standard [2], neglecting the constant factor C:

$$h_0(tT_c) = \frac{\sin(\pi t(1-r)) + 4rt \cos(\pi t(1+r))}{\pi t(1 - (4rt)^2)}$$

with the chip-length  $T_c$  and  $r = 0.22$  (chosen by 3GPP) (33)

### A. Singularities

This function has two removable singularities, one at  $t = 0$  and the other at  $t = \pm\frac{1}{4r}$ .

The function value at these singularities can be calculated using L'Hôpital's rule:

$$\lim_{x \rightarrow a} \frac{f(x)}{g(x)} = \lim_{x \rightarrow a} \frac{f'(x)}{g'(x)} \quad (34)$$

since  $\lim_{x \rightarrow a} f(x) = \lim_{x \rightarrow a} g(x) = 0$ .

### B. Zeroes Of Numerator and Denominator

The denominator function is obviously zero for arguments  $t = 0$  and  $t = \pm \frac{1}{4r}$ . The numerator function value at these arguments is also zero:

$$\begin{aligned} \left. \sin(\pi t(1-r)) + 4rt \cos(\pi t(1+r)) \right|_{t=0} &= \\ \sin(\pi 0(1-r)) + 4r0 \cos(\pi 0(1+r)) &= 0 \end{aligned}$$

and

$$\begin{aligned} \left. \sin(\pi t(1-r)) + 4rt \cos(\pi t(1+r)) \right|_{t=\pm \frac{1}{4r}} &= \\ \sin\left(\frac{\pi(1-r)}{\pm 4r}\right) \pm \cos\left(\frac{\pi(1+r)}{\pm 4r}\right) &= \end{aligned}$$

with  $\sin(-x) = -\sin(x)$  and  $\cos(-x) = \cos(x)$ :

$$\begin{aligned} \pm \sin\left(\frac{\pi(1-r)}{4r}\right) \pm \cos\left(\frac{\pi(1+r)}{4r}\right) &= \\ \pm \sin\left(\frac{\pi}{4r} - \frac{\pi}{4}\right) \pm \cos\left(\frac{\pi}{4r} + \frac{\pi}{4}\right) &= \end{aligned}$$

with  $\cos(x) = \sin(\frac{\pi}{2} - x)$ :

$$\begin{aligned} \pm \sin\left(\frac{\pi}{4r} - \frac{\pi}{4}\right) \pm \sin\left(\frac{\pi}{2} - \frac{\pi}{4r} - \frac{\pi}{4}\right) &= \\ \pm \sin\left(\frac{\pi}{4r} - \frac{\pi}{4}\right) \pm \sin\left(\frac{\pi}{4} - \frac{\pi}{4r}\right) &= \\ \pm \sin\left(\frac{\pi}{4r} - \frac{\pi}{4}\right) \mp \sin\left(\frac{\pi}{4r} - \frac{\pi}{4}\right) &= 0 \end{aligned}$$

### C. Derivatives

The derivative of the numerator function in eq. (33) is:

$$\begin{aligned} f'(t) &= \pi(1-r) \cos(\pi t(1-r)) + 4r \cos(\pi t(1+r)) \\ &\quad - 4rt\pi(1+r) \sin(\pi t(1+r)) \end{aligned} \quad (35)$$

The derivative of the denominator function in eq. (33) is:

$$g'(t) = \pi(1 - 48(rt)^2) \quad (36)$$

### D. Function Value

For  $t \rightarrow 0$  the function value of the impulse response function is

$$\begin{aligned} \lim_{t \rightarrow 0} \frac{f(t)}{g(t)} &= \lim_{t \rightarrow 0} \frac{f'(t)}{g'(t)} = \\ &= \frac{\pi(1-r) \cos(\pi 0(1-r)) + 4r \cos(\pi 0(1+r))}{\pi(1-48(r0)^2)} \\ &\quad - \frac{4r0\pi(1+r) \sin(\pi 0(1+r))}{\pi(1-48(r0)^2)} = \\ &= \frac{\pi(1-r)1 + 4r1}{\pi} \end{aligned} \quad (37)$$

$$\implies \boxed{h_0(0) = (1-r) + \frac{4r}{\pi}} \quad (38)$$

For  $t \rightarrow \pm \frac{1}{4r}$  the function value is

$$\begin{aligned} \lim_{t \rightarrow \pm \frac{1}{4r}} \frac{f(t)}{g(t)} &= \lim_{t \rightarrow \pm \frac{1}{4r}} \frac{f'(t)}{g'(t)} = \\ &= \frac{\pi(1-r) \cos\left(\frac{\pi}{4r}(1-r)\right) + 4r \cos\left(\frac{\pi}{4r}(1+r)\right)}{\pi(1-48\left(r\frac{1}{4r}\right)^2)} \\ &\quad \mp \frac{4r\frac{1}{4r}\pi(1+r) \sin\left(\pm \frac{\pi}{4r}(1+r)\right)}{\pi(1-48\left(r\frac{1}{4r}\right)^2)} = \\ &= \frac{1}{2\pi} \left( \pi(1-r) \cos\left(\frac{\pi}{4r}(1-r)\right) + 4r \cos\left(\frac{\pi}{4r}(1+r)\right) \right. \\ &\quad \left. - \pi(1+r) \sin\left(\frac{\pi}{4r}(1+r)\right) \right) = \\ &= \frac{1}{2\pi} \left( \pi(1+r) \sin\left(\frac{\pi}{4r}(1+r)\right) - \pi(1-r) \cos\left(\frac{\pi}{4r}(1-r)\right) \right. \\ &\quad \left. - 4r \cos\left(\frac{\pi}{4r}(1+r)\right) \right) \end{aligned} \quad (39)$$

with  $\sin(x+y) = \sin(x) \cos(y) + \cos(x) \sin(y)$   
and  $\cos(x+y) = \cos(x) \cos(y) - \sin(x) \sin(y)$ :

$$\begin{aligned} &= \frac{1}{2\pi} \left( \pi(1+r) \left( \sin\left(\frac{\pi}{4r}\right) \cos\left(\frac{\pi}{4}\right) + \cos\left(\frac{\pi}{4r}\right) \sin\left(\frac{\pi}{4}\right) \right) \right. \\ &\quad - \pi(1-r) \left( \cos\left(\frac{\pi}{4r}\right) \cos\left(\frac{\pi}{4}\right) + \sin\left(\frac{\pi}{4r}\right) \sin\left(\frac{\pi}{4}\right) \right) \\ &\quad \left. - 4r \left( \cos\left(\frac{\pi}{4r}\right) \cos\left(\frac{\pi}{4}\right) - \sin\left(\frac{\pi}{4r}\right) \sin\left(\frac{\pi}{4}\right) \right) \right) \end{aligned} \quad (40)$$

with  $\cos(\frac{\pi}{4}) = \sin(\frac{\pi}{4}) = \frac{1}{\sqrt{2}}$ :

$$\begin{aligned} &= \frac{1}{2\pi\sqrt{2}} \left( \pi(1+r) \left( \sin\left(\frac{\pi}{4r}\right) + \cos\left(\frac{\pi}{4r}\right) \right) \right. \\ &\quad - \pi(1-r) \left( \cos\left(\frac{\pi}{4r}\right) + \sin\left(\frac{\pi}{4r}\right) \right) \\ &\quad \left. - 4r \left( \cos\left(\frac{\pi}{4r}\right) - \sin\left(\frac{\pi}{4r}\right) \right) \right) \end{aligned} \quad (41)$$

$$\begin{aligned}
&= \frac{1}{2\pi\sqrt{2}} \left( \sin\left(\frac{\pi}{4r}\right)(\pi(1+r) - \pi(1-r) + 4r) \right. \\
&\quad \left. + \cos\left(\frac{\pi}{4r}\right)(\pi(1+r) - \pi(1-r) - 4r) \right) \\
&= \frac{1}{2\pi\sqrt{2}} \left( \sin\left(\frac{\pi}{4r}\right)(2\pi r + 4r) \right. \\
&\quad \left. + \cos\left(\frac{\pi}{4r}\right)(2\pi r - 4r) \right) \quad (42) \\
&= \frac{2r}{2\sqrt{2}} \left( \sin\left(\frac{\pi}{4r}\right)\left(1 + \frac{2}{\pi}\right) + \cos\left(\frac{\pi}{4r}\right)\left(1 - \frac{2}{\pi}\right) \right)
\end{aligned}$$

$$\boxed{h_0\left(\pm\frac{1}{4r}T_c\right) = \frac{r}{\sqrt{2}} \left( \left(1 + \frac{2}{\pi}\right) \sin\left(\frac{\pi}{4r}\right) + \left(1 - \frac{2}{\pi}\right) \cos\left(\frac{\pi}{4r}\right) \right)} \quad (43)$$

### E. Impulse Response

The impulse response graph<sup>1</sup> according to (eq 33) of the RRC filter is shown in Fig. 3.

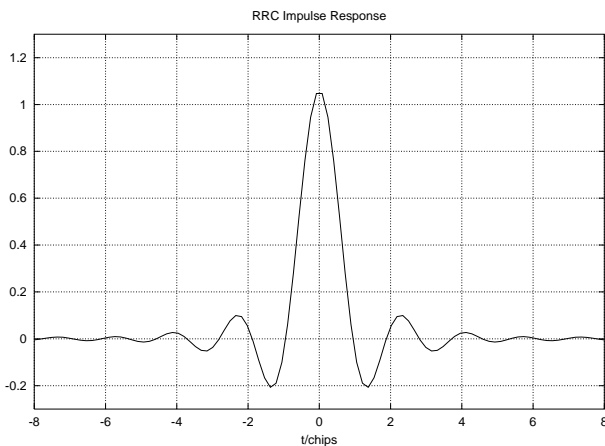


FIG. 3: Impulse Response

The impulse response of the root-raised cosine filter is not exactly zero at integral multiples of  $T_c$ , only the combined (raised cosine) filter can avoid inter-symbol interference.

For example, after one symbol length, hence for  $t = 1$ , the impulse response value is (from eq 33)

$$h_0(T_c) = \frac{\sin(\pi(1-r)) + 4r \cos(\pi(1+r))}{\pi(1-(4r)^2)} \neq 0 \quad (44) \quad r \in ]0,1[$$

<sup>1</sup> Interactive diagrams of the spectrum and the impulse response can be found at <http://www.michael-joost.de/tech.html>

### III. SPECTRUM

The spectrum<sup>1</sup> of the RRC filter is shown in Fig. 4.

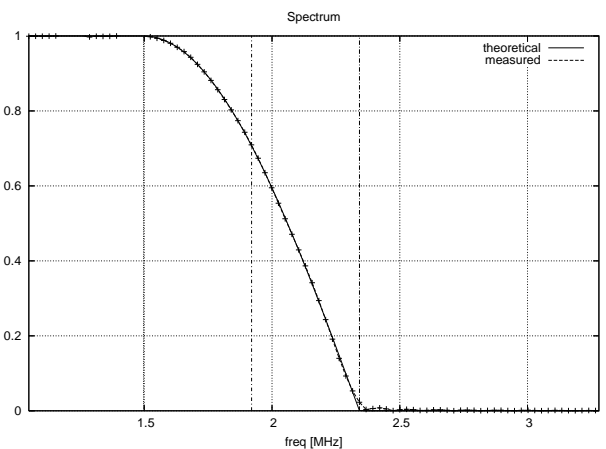


FIG. 4: Spectrum

### IV. FINITE IMPULSE RESPONSE FILTER

The RRC filter is implemented by a Finite Impulse Response (FIR) structure:

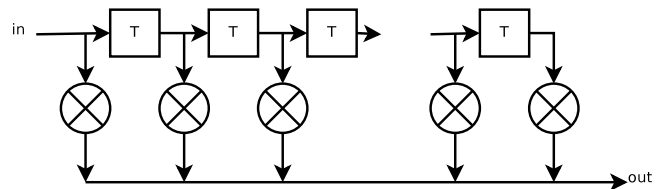


FIG. 5: FIR Filter Structure

The filter length is (for example)  $n = 32$  taps, multiplied by the oversampling factor  $osf$ . The  $n * osf + 1$  filter coefficients are determined according to (eq 33). The FIR filter causes a signal delay of half its length.

A FIR filter with oversampling factor 4 and  $4*32$  taps has a filtered response to a random digital input signal as shown in Fig. 6. The output signal has been shifted in this diagram by half the filter length, to match the position of the input signal.

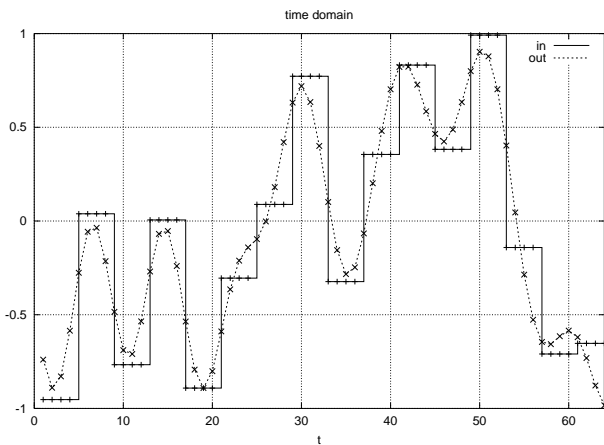


FIG. 6: RRC Time Domain Response

## V. CONCLUSIONS

A digital FIR filter can be used to reduce the bandwidth of the step-affected chip stream. The filter has to use oversampling ( $osf \geq 2$ ), as no frequencies above half the filter's sampling frequency can be handled (Nyquist), while the upper frequency point  $\omega_2$  is at more than half the chip rate.

## VI. REFERENCES

- [1] Wikipedia:  
*Raised cosine*  
[http://en.wikipedia.org/wiki/Raised\\\_cosine](http://en.wikipedia.org/wiki/Raised\_cosine)
- [2] 3GPP  
*standard 25.104*, sect 6.8.1  
<http://www.3gpp.org>
- [3] M.Joost  
*Interactive diagrams of RC and RRC filter: spectrum, impulse response, eye diagram*  
<http://www.michael-joost.de/tech.html>

## Appendix

### 1. Energy in Frequency-Domain of Raised Cosine Filter

$$\begin{aligned} \|H_{RC}\|^2 &= \int_{-\infty}^{\infty} |H_{RC}(\omega)|^2 d\omega = 2 \int_0^{\infty} |H_{RC}(\omega)|^2 d\omega \\ &= 2A^2\omega_1 + \frac{A^2}{2} \int_{\omega_1}^{\omega_2} (1 + \cos(\pi \frac{\omega - \omega_1}{r\omega_c}))^2 d\omega \end{aligned} \quad (45)$$

The integral can be written as

$$\begin{aligned} &\int (1 + \cos(\pi \frac{\omega - \omega_1}{r\omega_c}))^2 d\omega \\ &= \int (1 + 2 \cos(a\omega + b) + \cos^2(a\omega + b)) d\omega \\ &\quad \text{with } a = \frac{\pi}{r\omega_c} \quad \text{and } b = \frac{r-1}{2r}\pi \\ &= \int d\omega + 2 \int \cos(a\omega + b) d\omega + \int \cos^2(a\omega + b) d\omega \end{aligned} \quad (46)$$

Now we need to find the primitives for those three integrals. The first integral yields  $\omega$ , obviously.

For the second integral, using the substitution rule

$$\int f(g(x)) dx = \int f(z) \frac{1}{g'(x)} dz \quad \text{with } z = g(x) \quad (47)$$

we get the primitive:

$$\begin{aligned} \text{with } f(z) &= \cos(z), \quad z = g(\omega) = a\omega + b, \quad g'(\omega) = a \\ \int \cos(a\omega + b) d\omega &= \int \cos(z) \frac{1}{a} dz \\ &= \frac{1}{a} \sin(z) = \frac{1}{a} \sin(a\omega + b) \end{aligned} \quad (48)$$

For the third integral, considering the partial integration rule

$$\int f(x)g'(x) dx = f(x)g(x) - \int f'(x)g(x) dx \quad (49)$$

and

$$f(\omega) = \cos(a\omega + b) \quad g(\omega) = \frac{1}{a} \sin(a\omega + b) \quad (50)$$

$$f'(\omega) = -a \sin(a\omega + b) \quad g'(\omega) = \cos(a\omega + b) \quad (51)$$

we get

$$\int \cos^2(a\omega + b) d\omega = \frac{1}{a} \sin(a\omega + b) \cos(a\omega + b) + \int \sin^2(a\omega + b) d\omega \quad (52)$$

Since  $\sin(x) \cos(x) = \frac{1}{2} \sin(2x)$   
and  $\sin^2(x) = 1 - \cos^2(x)$

$$\int \cos^2(a\omega + b) d\omega = \frac{1}{2a} \sin(2(a\omega + b)) + \int (1 - \cos^2(a\omega + b)) d\omega \quad (53)$$

$$\int \cos^2(a\omega + b) d\omega = \frac{1}{2a} \sin(2(a\omega + b)) + \omega - \int \cos^2(a\omega + b) d\omega \quad (54)$$

$$\begin{aligned} \Rightarrow 2 \int \cos^2(a\omega + b) d\omega &= \frac{1}{2a} \sin(2(a\omega + b)) + \omega \\ \Rightarrow \int \cos^2(a\omega + b) d\omega &= \frac{1}{4a} \sin(2(a\omega + b)) + \frac{\omega}{2} \end{aligned} \quad (55)$$

Inserting the integral parts from (48) and (55) into (46) yields the primitive

$$\begin{aligned} F(\omega) &= \omega + 2 \frac{1}{a} \sin(a\omega + b) \\ &\quad + \frac{1}{4a} \sin(2(a\omega + b)) + \frac{\omega}{2} \\ &= \frac{3\omega}{2} + \frac{2}{a} \sin(a\omega + b) \\ &\quad + \frac{1}{4a} \sin(2(a\omega + b)) \end{aligned} \quad (56)$$

The definite integral in (45) has the value

$$\begin{aligned} F(\omega_2) - F(\omega_1) &= \frac{3\omega_2}{2} + \frac{2}{a} \sin(a\omega_2 + b) \\ &\quad + \frac{1}{4a} \sin(2(a\omega_2 + b)) \\ &\quad - \frac{3\omega_1}{2} - \frac{2}{a} \sin(a\omega_1 + b) \\ &\quad - \frac{1}{4a} \sin(2(a\omega_1 + b)) \\ &= \frac{3(\omega_2 - \omega_1)}{2} \\ &\quad + \frac{2}{a} \left( \sin(a\omega_2 + b) - \sin(a\omega_1 + b) \right) \\ &\quad + \frac{1}{4a} \left( \sin(2(a\omega_2 + b)) - \sin(2(a\omega_1 + b)) \right) \end{aligned} \quad (57)$$

With  $\sin(x) - \sin(y) = 2 \sin\left(\frac{x-y}{2}\right) \cos\left(\frac{x+y}{2}\right)$ :

$$\begin{aligned} &= \frac{3r\omega_c}{2} \\ &\quad + \frac{2}{a} 2 \sin\left(\frac{a}{2}(\omega_2 - \omega_1)\right) \cos\left(\frac{a}{2}(\omega_1 + \omega_2) + b\right) \\ &\quad + \frac{1}{4a} 2 \sin(a(\omega_2 - \omega_1)) \cos(a(\omega_1 + \omega_2) + 2b) \end{aligned} \quad (58)$$

The argument to the first of the  $\sin()$  terms is

$$\begin{aligned} \frac{a}{2}(\omega_2 - \omega_1) &= \frac{\pi}{2r\omega_c} \left( \frac{1+r}{2}\omega_c - \frac{1-r}{2}\omega_c \right) \\ &= \frac{\pi}{2r\omega_c} \frac{\omega_c}{2} (1+r - 1+r) = \frac{\pi}{2} \end{aligned} \quad (59)$$

so,  $\sin\left(\frac{\pi}{2}\right) = 1$ , and accordingly for the second  $\sin()$  term:  $\sin(\pi) = 0$ .

The definite integral is therefore

$$\begin{aligned} &= \frac{3r\omega_c}{2} \\ &\quad + \frac{4}{a} \cos\left(\frac{\pi}{2r\omega_c} \left( \frac{1+r}{2}\omega_c + \frac{1-r}{2}\omega_c \right) + \frac{r-1}{2r}\pi\right) \\ &= \frac{3r\omega_c}{2} + \frac{4}{a} \cos\left(\frac{\pi}{2r\omega_c} \frac{2\omega_c}{2} + \frac{r-1}{2r}\pi\right) \\ &= \frac{3r\omega_c}{2} + \frac{4}{a} \cos\left(\frac{\pi}{2r}(1+r-1)\right) \\ &= \frac{3r\omega_c}{2} + \frac{4}{a} \cos\left(\frac{\pi}{2}\right) \\ &= \frac{3r\omega_c}{2} \end{aligned} \quad (60)$$

Now we can calculate the energy from (45):

$$\begin{aligned} \|H_{RC}\|^2 &= 2A^2\omega_1 + \frac{A^2}{2} \frac{3r\omega_c}{2} \\ &= \frac{4\pi^2}{\omega_c^2} \left( 2 \frac{1-r}{2}\omega_c + \frac{3r\omega_c}{4} \right) \\ &= \frac{\pi^2}{\omega_c} (4(1-r) + 3r) \end{aligned} \quad (61)$$

$$\Rightarrow \boxed{\|H_{RC}\|^2 = \frac{\pi^2}{\omega_c} (4-r)} \quad (62)$$

## 2. Energy in Frequency-Domain of Root-Raised Cosine Filter

Calculating the energy for the RRC filter is surprisingly simple.

$$\begin{aligned}
\|H_{RRC}\|^2 &= \int_{-\infty}^{\infty} |H_{RRC}(\omega)|^2 d\omega \\
&= 2 \int_0^{\infty} |H_{RRC}(\omega)|^2 d\omega \\
&= 2B^2\omega_1 + B^2 \int_{\omega_1}^{\omega_2} (1 + \cos(\frac{\pi}{r\omega_c}(\omega - \omega_1))) d\omega \\
&= \frac{2\pi}{\omega_c} \left( 2\omega_1 + (\omega_2 - \omega_1) \right. \\
&\quad \left. + \int_{\omega_1}^{\omega_2} \cos(\frac{\pi}{r\omega_c}(\omega - \omega_1)) d\omega \right)
\end{aligned} \tag{63}$$

For the integral we know the primitive from (eq 48):

$$\begin{aligned}
F(\omega) &= \frac{1}{a} \sin(a\omega + b) \\
&= \frac{r\omega_c}{\pi} \sin(\frac{\pi}{r\omega_c}\omega + \frac{\pi}{2r}(r-1))
\end{aligned} \tag{64}$$

Thus, the definite integral is:

$$\begin{aligned}
F(\omega_2) - F(\omega_1) &= \frac{r\omega_c}{\pi} \sin(\frac{\pi}{r\omega_c}\omega_2 + \frac{\pi}{2r}(r-1)) \\
&\quad - \frac{r\omega_c}{\pi} \sin(\frac{\pi}{r\omega_c}\omega_1 + \frac{\pi}{2r}(r-1)) \\
&= \frac{r\omega_c}{\pi} \sin(\frac{\pi}{r\omega_c}\omega_c \frac{1+r}{2} + \frac{\pi}{2r}(r-1)) \\
&\quad - \frac{r\omega_c}{\pi} \sin(\frac{\pi}{r\omega_c}\omega_c \frac{1-r}{2} + \frac{\pi}{2r}(r-1)) \\
&= \frac{r\omega_c}{\pi} \sin(\frac{\pi}{2r}(1+r+r-1)) \\
&\quad - \frac{r\omega_c}{\pi} \sin(\frac{\pi}{2r}(1-r+r-1)) \\
&= \frac{r\omega_c}{\pi} \sin(\frac{\pi}{2r}2r) - \frac{r\omega_c}{\pi} \sin(\frac{\pi}{2r}2) \\
&= \frac{r\omega_c}{\pi} \sin(\pi) - \frac{r\omega_c}{\pi} \sin(0) = 0
\end{aligned} \tag{65}$$

That leaves

$$\|H_{RRC}\|^2 = \frac{2\pi}{\omega_c}(\omega_1 + \omega_2) = \frac{2\pi}{\omega_c}\omega_c \tag{66}$$

$$\Rightarrow \boxed{\|H_{RRC}\|^2 = 2\pi} \tag{67}$$

## 3. Energy in Time-Domain of Root-Raised Cosine Filter

$$\begin{aligned}
\|f_{RRC}\|^2 &= \int_{-\infty}^{\infty} |f_{RRC}(t)|^2 dt \\
&= \frac{2T_c}{\pi^2} \int_0^{\infty} \frac{(\sin((1-r)\pi\frac{t}{T_c}) + 4r\frac{t}{T_c} \cos((1+r)\pi\frac{t}{T_c}))^2}{t^2(1-(4r\frac{t}{T_c})^2)^2} dt \\
&= \frac{2T_c}{\pi^2} \int_0^{\infty} \frac{(\sin(\omega_1 t) + kt \cos(\omega_2 t))^2}{t^2(1-(kt)^2)^2} dt \\
&\quad \text{with } \omega_1 = \frac{(1-r)\pi}{T_c} \quad \omega_2 = \frac{(1+r)\pi}{T_c} \\
&\quad k = \frac{4r}{T_c}
\end{aligned}$$

$$\begin{aligned}
\|f_{RRC}\|^2 &= \frac{2T_c}{\pi^2} \left( \int_0^{\infty} \frac{\sin^2(\omega_1 t)}{t^2(1-(kt)^2)^2} dt \right. \\
&\quad \left. + 2k \int_0^{\infty} \frac{t \sin(\omega_1 t) \cos(\omega_2 t)}{t^2(1-(kt)^2)^2} dt \right. \\
&\quad \left. + k^2 \int_0^{\infty} \frac{t^2 \cos^2(\omega_2 t)}{t^2(1-(kt)^2)^2} dt \right) \\
&= \frac{2T_c}{\pi^2} \left( \int_0^{\infty} \frac{\sin^2(\omega_1 t)}{t^2(1-(kt)^2)^2} dt \right. \\
&\quad \left. + k \int_0^{\infty} \frac{t(\sin(\omega_c t) - \sin(r\omega_c t))}{t^2(1-(kt)^2)^2} dt \right. \\
&\quad \left. + k^2 \int_0^{\infty} \frac{t^2 \cos^2(\omega_2 t)}{t^2(1-(kt)^2)^2} dt \right) \\
&\quad \dots \\
&= 1
\end{aligned} \tag{68}$$